LED Flood Light





Available Power: 50W/80W/100W/150W/200W

Features

- 1) Streamline and ultra Slim design, the newest led flood lights in the market
- 2) Adopt Philips chip SMD3030 LEDs, the lumen output is higher than normal COB LED.
- 3) Reasonable structure, good at cooling, waterproof, dustproof and so on.
- 4) Lamps installed by screws, the process is simple, the lamp is securely installed.
- 5) 4mm thickness temperred glass, high light transmittance rate and good protect LEDs

Applications

- 1) Tunnel, subway, underground lighting;
- 2) Gymnasium, sports stadium lighting;
- 3) Building, Billboard lighting;
- 4) Gas station, Garage Lighting;
- 5) Park, Garden Lighting;
- 6) Other indoor & outdoor occasions















Specifications

LED Type 3030SMD

LED Brand Philips

Lumen Efficiency 130lm/W

LED Lifespan 50,000H

IP Rating IP65

Mains Voltage 85-265VAC, 50-60Hz

Beam Angle 120° standard

White Colour Temp (K) Cool (6000), Day (4000), Warm (3000K)


Power Factor >0.9 (Commercial/Industrial Grade)

CRI 73-81

Mounting Universal, Pivoting Mounting bracket, pipe-mount extra

Model	Max. lumen	Watts	IP Rate	Color Temperature	Product packing info		
					CTN/QTY	CTN size	G.W.
KL-FL50WB3	6000LM	50W	IP65	AC85-265V, 50/60Hz	6	51*32*50cm	15KG
KL-FL80WB3	10000LM	80W	IP65	AC85-265V, 50/60Hz	4	43*41*33cm	18KG
KL-FL100WB3	12500LM	100W	IP65	AC85-265V, 50/60Hz	4	43*41*33cm	18KG
KL-FL150WB3	19000LM	150W	IP65	AC85-265V, 50/60Hz	3	51*47*39cm	15KG
KL-FL200WB3	25000LM	200W	IP65	AC85-265V, 50/60Hz	3	51*47*39cm	15KG

Exploded View

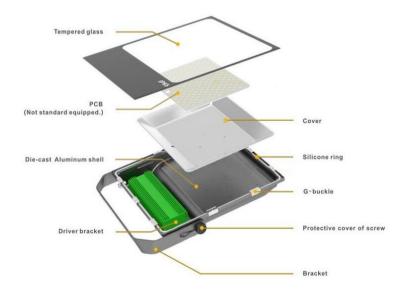

Installation

- Step 1: Cut off the power
- Step 2: Check fittings, get installation tools ready.
- Step 3: Fixed lamp on stand as the installation pictures show.
- Step 4: Put the drive on ceiling or other suitable place.
- Step 5: Ensure water proof and moisture proof when outdoor use, waterproof junction box is suggested when
- wires connected, please refer to the installation pictures.
- Step 6: Adjust angle and fix, connect to the power after checking without problem.