


Polaris PQ-512/15 Printhead

**512-Channel
Inkjet Printhead**

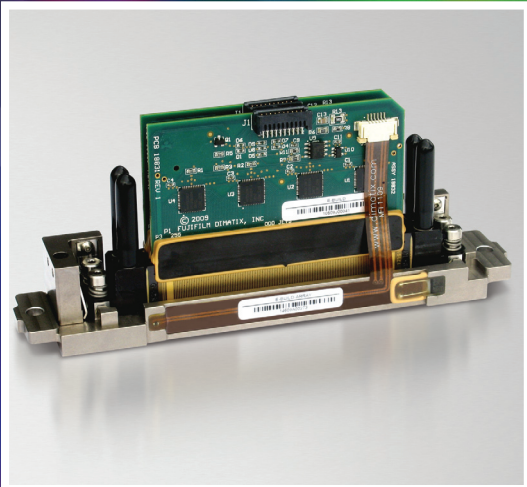

Polaris PQ-512/15 Printhead

Features:

- 15 picoliter nominal drop size
- 512 individual addressable nozzles
- Incorporates VersaDrop™ binary jetting capability
- Excellent channel-to-channel uniformity
- High frequency continuous operation
- Designed for long service life
- Integral mounting bezel with precision features
- Configurable for single- and two-color operation
- Optimized for high viscosity jetting fluids
- Built-in heaters and temperature sensors
- Operation up to 60°C [140°F]
- Simplified field repair with no special tools required

The Spectra® Polaris PQ-512/15 is a high performance inkjet printhead designed for a broad range of industrial and commercial printing applications at resolutions up to 1000 dpi. Robust construction and repairable design make it ideal for solvent and UV wide format printers built for demanding production environments.

Building upon the legendary reliability and performance of the Spectra Nova and Galaxy printheads, the Polaris PQ-512 family of printheads uses field proven materials and a repairable design to deliver a long service life and consistent output. And by leveraging the inherent flexibility of the Q-Class platform, the Polaris PQ-512 offers even greater jetting performance, nozzle packing density, and configuration flexibility.

The Polaris PQ-512/15 Printhead has 512 independent channels arranged in multiple rows at 200 dots-per-inch spacing for single color operation, or 100 dots-per-inch spacing for two color operation. The printhead is designed for binary jetting using a 15-picoliter native drop size with 8-meters per second nominal drop velocity for jetting fluids in the 10 to 14 centipoise range. Using VersaDrop jetting technology, the printhead is capable of adjustable binary operation at drop sizes up to 30 picoliters.

The PQ-512/15 Printhead is compatible with a broad range of inks, including UV-curable, aggressive organic solvent inks and associated maintenance fluids.

The unique design of Polaris PQ-512/15 Printhead allows each 256-channel module to be replaced and accurately registered in the field with no special tools or recalibration. An integral mounting bezel with precision registration points enables drop-in alignment with other carriage features.

Two electrical connectors contain eight serial data lines that supports fire frequencies in excess of 50 kHz.

The flexible fluid interface allows single and two-color operation. Each 256-channel module is dual ported to facilitate flushing and ink recirculation. Heaters and temperature sensors allow precise control of ink viscosity at jetting temperatures up to 60°C.



www.dimatix.com


Parameter

Polaris PQ-512/15 Printhead

Number of addressable jets	512						
Print width	64.897 mm (2.555 inches)						
NOZZLE SPACING:							
Single color (4 rows of jets)	127 microns [0.005 in.] (200 dpi)						
Two color (2 rows of jets/per color)	254 microns [0.010 in.] (100 dpi)						
Jet straightness, 1 sigma*	4 mrad [0.2°]						
Nominal drop velocity	8 m/s						
Calibrated drop mass	15ng						
Compatible jetting fluids	UV-curable, organic solvents						
BINARY OPERATION:							
Adjustment for drop size	15 - 30 picoliters						
Productivity	<table border="1"> <thead> <tr> <th>Drop Size</th><th>Maximum Frequency</th></tr> </thead> <tbody> <tr> <td>15 pl</td><td>40 kHz</td></tr> <tr> <td>30 pl</td><td>25 kHz</td></tr> </tbody> </table>	Drop Size	Maximum Frequency	15 pl	40 kHz	30 pl	25 kHz
Drop Size	Maximum Frequency						
15 pl	40 kHz						
30 pl	25 kHz						
Operating temperature range	up to 60° C						
Fluid viscosity at jetting	10 to 14 centipoise						
Dry weight	160 grams						


*at constant frequency

Physical Characteristics

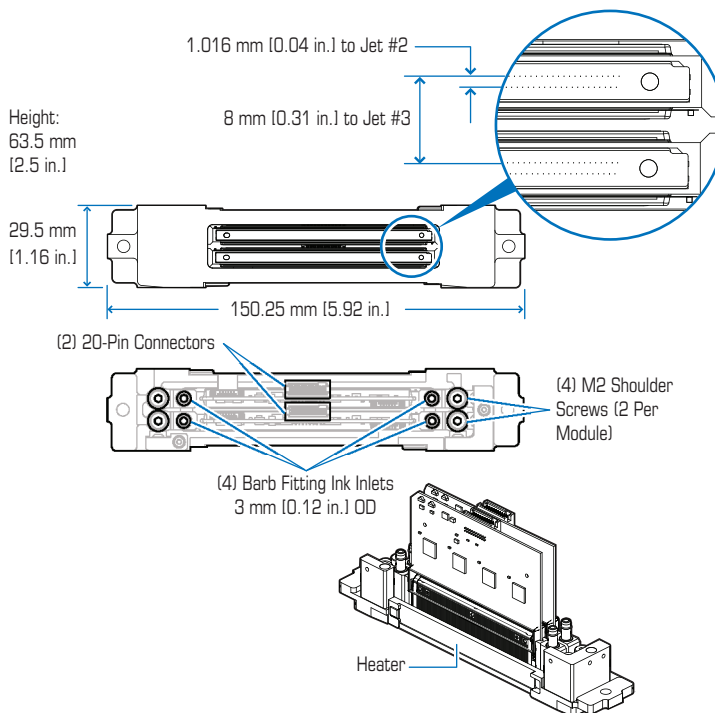


Jetting Characteristics

15pl Velocity vs. Frequency

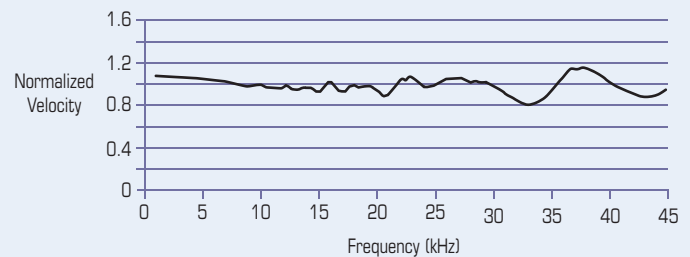

30pl Velocity vs. Frequency

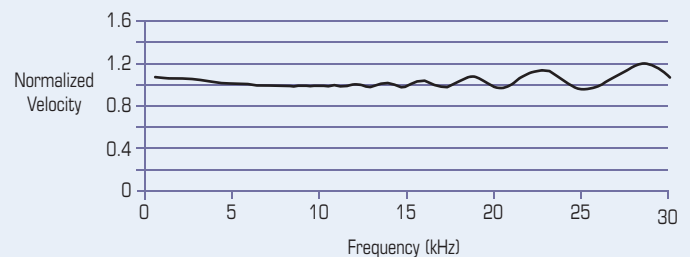

Product data presented above are for guideline purposes only. For design and engineering work using this product, please contact Dimatix Technical Support for the appropriate Product Manual containing full Product Specifications.



Corporate Office:
FUJIFILM Dimatix, Inc.
2230 Martin Avenue
Santa Clara, CA 95050
USA

Tel: (408) 565-9150
Fax: (408) 565-9151
Email: info@dimatix.com

New Hampshire Facility:
FUJIFILM Dimatix, Inc.
109 Etna Road
Lebanon, NH 03766
USA

Tel: (603) 443-5300
Fax: (603) 448-9870
Email: info@dimatix.com

Japan Office:
Advanced Marking Business Division
FUJIFILM Corporation
Midtown West, 7-3, Akasaka 9-Chome
Minato-ku, Tokyo 107-0002
Japan

Tel: +81 3 6271 1091
Fax: +81 3 6271 1165
E-mail: front.ambd@fujifilm.co.jp

European Office:
Tel: +44 7739 863 505
Fax: +44 870 167 4328
Email: euro@dimatix.com

Korean Office:
Tel: +82 2 6242 6012
Fax: +82 2 6242 6012
Email: korea@dimatix.com

China Office:
Email: china@dimatix.com