



E-mail:weihuacranes@Gmail.com 电话:13643909869



E-mail: weihuacrane@gmail.com 电话: 13643909869

CD₁、MD₁ 电动葫芦

CD₁、MD₁ Electric Hoist

简介 A Brief Introduction

CD₁型, MD₁型钢丝绳电动葫芦是一种轻小型起重设备, 它可以安装在葫芦单梁、桥式起重机、门式起重机、悬臂起重机上。稍加改动, 还可作卷扬用。因此, 它是工厂、矿山、港口、仓库、货场、商店等常用的起重设备之一, 是提高劳动效率, 改善劳动条件的必备机械。

CD₁型电动葫芦的起升速度为常速, 可以满足一般使用要求; MD₁型电动葫芦具有两种起升速度——常速和慢速。慢速工作时, 可以满足精密装卸, 砂箱合模, 机床检修等精细作业的要求。所以, MD₁型电动葫芦的适用范围比CD₁型电动葫芦更为广泛。


为满足较大吨位起重作业的要求, 我厂还生产WH20T, 32T电动葫芦。

Model CD₁, MD₁ Wire-rope Electric Hoist is a small-sized lifting equipment, which can be mounted on single beam, bridge, gant and Jib cranes, With slight modification, it can also be used as a winch. It is widely used in factories, mines, harbours, warehouses, cargo storage areas and shops, essential in raising working efficiency and improving working conditions.

Model CD₁ Electric Hoist has only one normal speed, which can satisfy normal application, Model MD₁ Electric Hoist provides two speeds; normal speed and low speed, At a low speed, it can do precise loading and unloading, mounding of sand box, maintenance of machine tools, etc. Thus Model MD₁ Electric Hoists is more widely used than Model CD₁.

To meet the needs of lifting heavier cargo, our factory also manufactures WH20, WH32T Electric hoist.

250 Kg
500 Kg
1000 Kg
2000 Kg
3000 Kg
5000 Kg
10000 Kg
16000 Kg
20000 Kg
32000 Kg

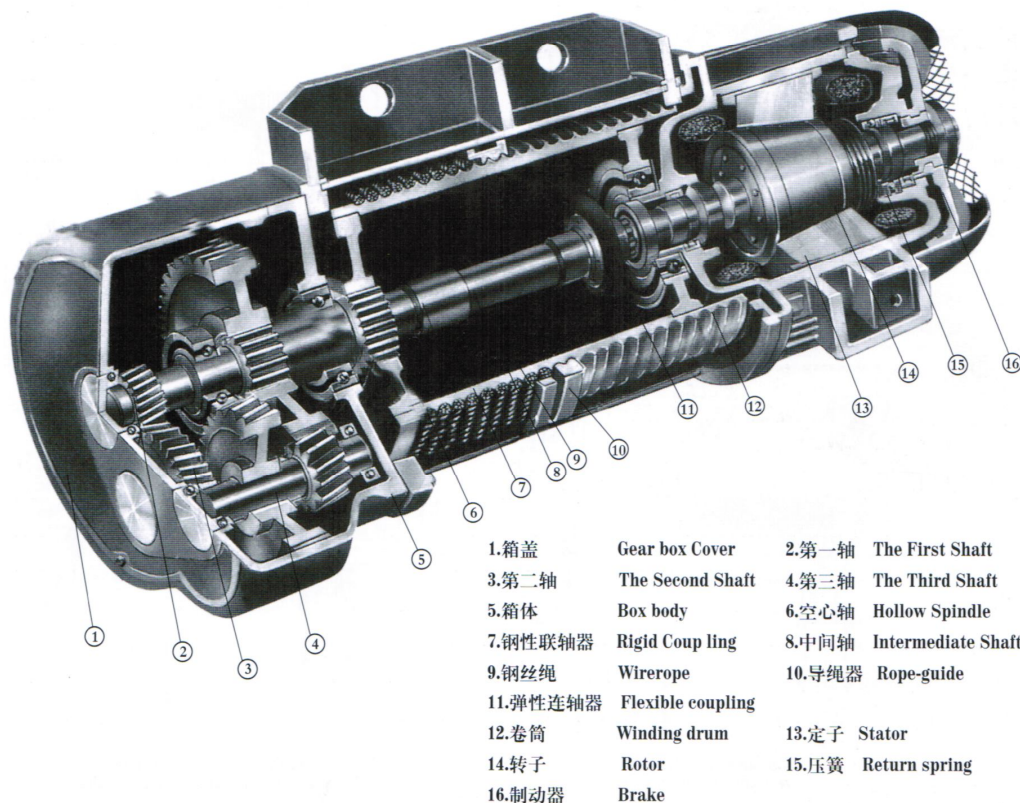


中国驰名商标




中国名牌产品

CD₁、MD₁电动葫芦


CD₁、MD₁ Electric Hoist

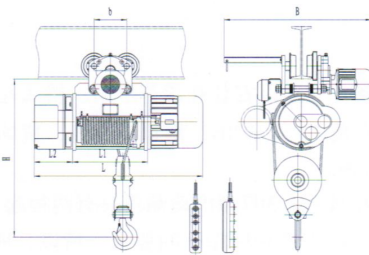


CD/MD, 型0.25-5吨 (H=6-9米)
Model CD₁/MD₁ 0.25-5t (H=6-9m)

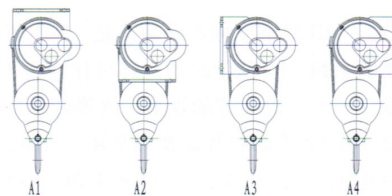


CD/MD, 型固定式
Model CD₁/MD₁ Stationary

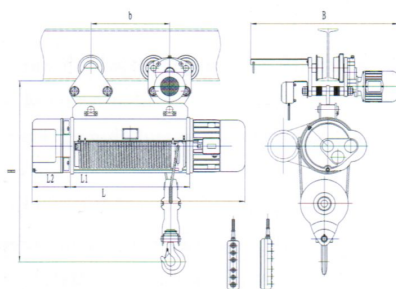


CD/MD, 型0.5-5吨 (H=12-30米)
Model CD₁/MD₁ 0.5-5t (H=12-30m)

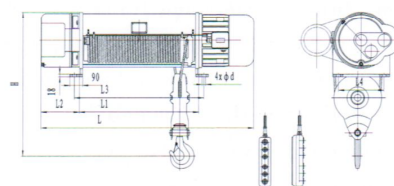


CD/MD, 型固定式0.5-5吨 (H=12-30米)
Model CD₁/MD₁ Stationary 0.5-5t (H=12-30m)

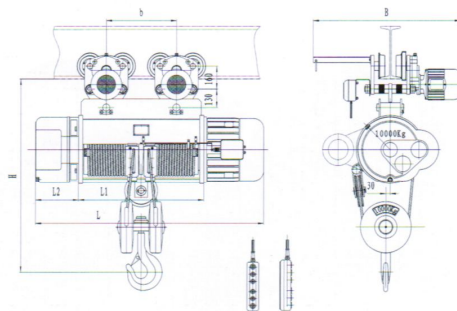


CD/MD, 型10吨 (H=9-30米)
Model CD₁/MD₁ 10t (H=9-30m)

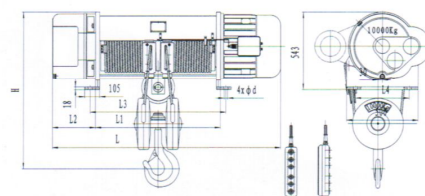

CD/MD, 型固定式10吨 (H=9-30米)
Model CD₁/MD₁ Stationary 10t (H=9-30m)

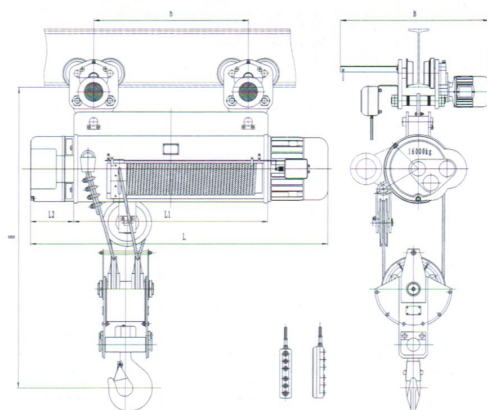

CD/MD, 型16吨 (H=9-30米)
Model CD₁/MD₁ 16t (H=9-30m)

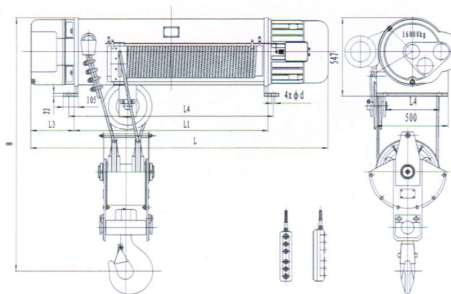

CD/MD, 型固定式16吨 (H=9-30米)
Model CD₁/MD₁ Stationary 16t (H=9-30m)

WEIHUA

卫华集团
WEIHUA
CRANE

中國名舞作品






E-mail: weihuacranes@Gmail.com 电话:13643909869

WH电动葫芦


WH Electric hoist




卫华集团
WEIHUA
CRANE

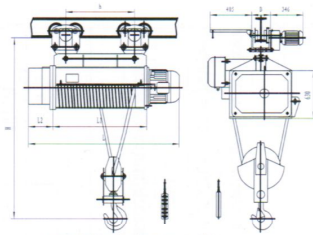


WH164型16吨 (H=12-48米)
Model WH164 16T(Hoisting 12-48m)

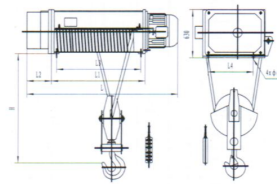


WH164型固定式16吨 (H=12-48米)
Model WH164 Stationary 16T(Hoisting 12-48m)

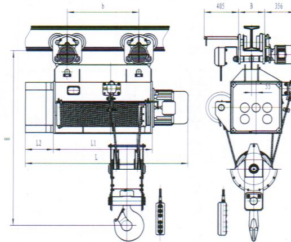


WH164型16吨 (H=9-36米)
Model WH164 16T(Hoisting 9-36m)

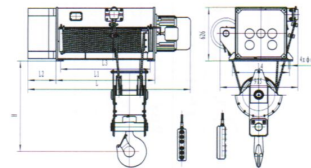


WH164型固定式16吨 (H=9-36米)
Model WH164 Stationary 16T(Hoisting 9-36m)

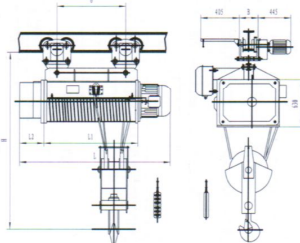


WH164型20吨 (H=9-24米)
Model WH164 20T(Hoisting 9-24m)

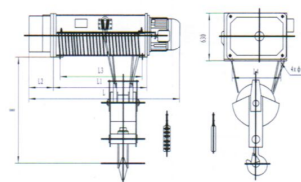


WH164型固定式20吨 (H=9-24米)
Model WH164 Stationary 20T(Hoisting 9-24m)

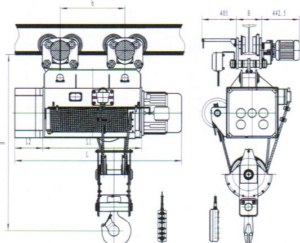


WH164型20吨 (H=9-30米)
Model WH164 20T(Hoisting 9-30m)

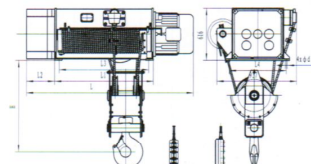

WH164型固定式20吨 (H=9-30米)
Model WH164 Stationary 20T(Hoisting 9-30m)

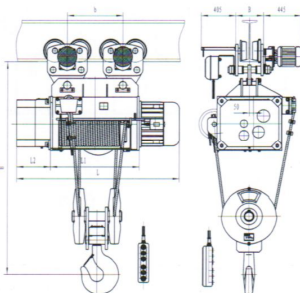

WH164型32吨 (H=9-24米)
Model WH164 32T(Hoisting 9-24m)

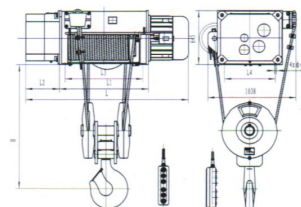

WH164型固定式32吨 (H=9-24米)
Model WH164 Stationary 32T(Hoisting 9-24m)

WH电动葫芦

WH Electric hoist

起重量		Capacity(t)		16																20																32															
型号		Type		WH164								WH164II								WH164								WH164II								WH164															
起升高度		Hoisting height(m)		12	16	24	32	36	42	48	9	12	15	18	21	24	27	30	33	36	9	12	18	24	9	12	15	18	21	24	27	30	9	12	16	20	24														
起升速度		Hoisting speed(m/min)		6 (0.6/6)								4.2 (0.42/4.2)								3.3 (0.33/3.3)								4.2 (0.42/4.2)								3 (0.3/3)															
运行速度		Travel speed(m/min)		18																14								14								16															
钢丝绳	绳径	Dia(mm)		26								17.5								14								21.5								26															
	结构	Specification		6×37																																															
运行轨道		Track		50a-63e																56a-63e																63e以上															
最小曲率半径		Min curvature radius(m)		3	3.5	4	5	6	7	8	3	3.5	4	5	6	7	8	9	10	11	3	4	5.5	7.6	3	3.5	4	5	6	7	8	9	3.5	4.5	5.8	7.2	8.7														
起升电机	型号	Type		ZDX62-6(ZDS _i)								Zd51-4(ZDS _i)								Zd52-4(ZDS _i)								ZDX62-6(ZDS _i)																							
	功率	Power(RW)		18.5(2.2/18.5)								13(1.5/13)								18.5(2.2/18.5)								18.5(2.2/18.5)																							
	转速	Rotation speed(r/min)		960								1400																960																							
	电流	Current(A)		43								30(5.2/30)								42								43																							
运行电机	型号	Type		ZDY _i 21-4																ZDY(D) _i 21-4																ZDY(D) _i															
	功率	Power(RW)		0.8																0.8																1.5															
	转速	Rotation speed(r/min)		1380																1380																1380															
	电流	Current(A)		2.4																2.4																4.3															
结合次数		No.of connecting(次)		120																																															
工作制度		Working system		中级 Intermediate FC=25%																																															
电源		Power source		三相交流 Three phase AC 380V 50Hz																																															
基本尺寸	L	Basic Dimensions mm	1666	1811	2106	2391	2546	2766	2986	1646	1735	1913	2091	2269	2447	2625	2803	2981	3159	1875	2108	2574	3040	1747	1942	2153	2364	2575	2786	2997	3208	1913	2127	2412	2697	2982															
	L1		810	955	1250	1535	1690	1910	2130	808	986	1164	1342	1520	1698	1876	2054	2232	2410	1004	1237	1703	2169	948	1143	1354	1565	1776	1987	2198	2409	1056	1270	1555	1840	2125															
	L2		396								330								402								330								396																
	L3		685	830	1125	1410	1565	1785	2005	700	878	1056	1234	1412	1590	1768	1946	2124	2302	858	1091	1557	2023	840	1035	1246	1457	1668	1879	2090	2301	916	1130	1415	1700	1985															
	L4		600								670								600								670								600																
	b		505	650	945	1230	1385	1605	1825	488	666	844	1022	1200	1378	1556	1734	1912	2090	604	837	1303	1769	548	743	954	1165	1376	1587	1798	2009	656	870	1155	1440	1725															
	B		288~310																306~320								288~310								320																
	H		2600(1300)								2300(1300)								2500(1300)								2300(1300)								2500(1500)																
	d		25																																																
自重 ±10%	运行 Operate	Crane weight Kg	2100	2200	2400	2550	2650	2800	2900	1530	1602	1673	1745	1816	1887	1959	2030	2100	2173	2450	2620	2800	3250	1838	1927	2025	2169	2240	2320	2444	2527	2885	2950	3270	3495	3700															
	固定 Fix		1700	1800	2000	2150	2225	2400	2500	1183	1255	1308	1379	1450	1522	1593	1665	1736	1807	1750	1920	2100	2550	1375	1453	1539	1630	1759	1838	1962	2045	2115	2170	2475	2690	2880															