


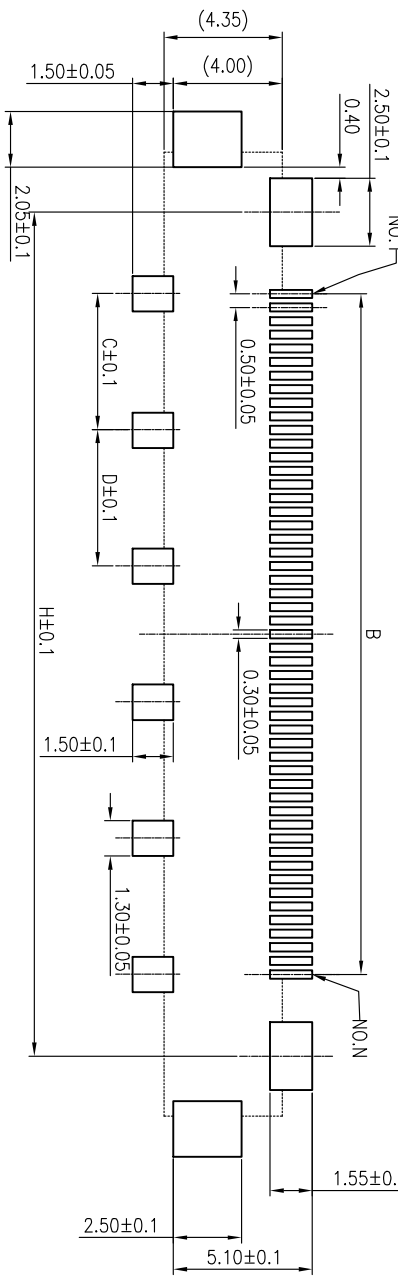


DIMENSION		A	B	C	D	E	F	G	H
41	PN	26.00	20.00	4.00	4.00	30.20	32.80	30.95	27.00
51		31.00	25.00	5.00	5.00	35.20	37.80	35.95	31.00

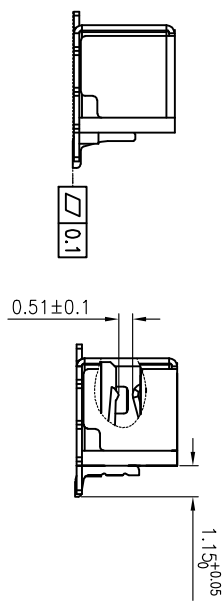

SCALE 2.000

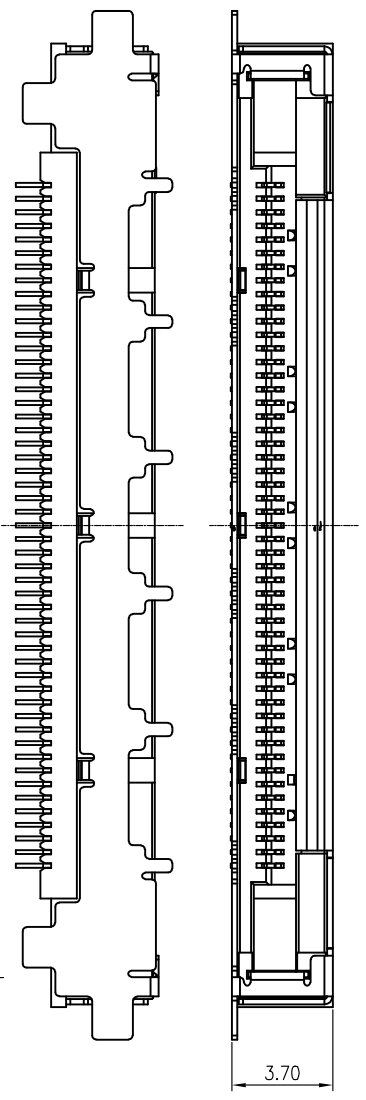

OTES:

- 1.INSULATOR:ICP+20%G/F U194 V-0 COLOR:BLACK
- 2.CONTACT:COPPER ALLOY T=0.2mm  
PLATING:CONTACT AREA GOLD FLASH  
OTHER AREA 80~120u" TIN  
OVER ALL 50u"Min NICKEL UNDER PLATED
- 3.SHELL:COPPER ALLOY T=0.2mm  
PLATING:MATTE TIN 80~120u"(LEAD FREE)  
OVER ALL 20u"Min NICKEL UNDER PLATED
- 4.PART NO:16-12-XX01-12

NO. OF CONTACT

- PACK:
- 1:Tape
  - 2:Reel
- Plating code:
- 1: Tin-leadplated
  - 2: Gold flash
  - 3: Gold 3u"
  - 4: Gold 5u"

SER AREA	REVISIONS	CHK	DATE	UNIT	MM	NUMBER	SCALE	SIZE	NAME	WVS SHIELD TYP	REV
				ANG.	40/30'	杨大宽	2013/06/28	A3	RD1100101	05PH FEMALE	A

**东莞市宽拓电子科技有限公司**  
Dongguan Kuantuo Electronics Co., Ltd

UNLESS OTHERWISE SPECIFIED	APPROVED	DATE	PART NO
TOLERANCES ARE XX ±0.20	CHECKED	DATE	16-12-XX01-12
X.XXX ±0.10	DRAWN	DATE	DRAWING NO
ANG. 40/30'	杨大宽	2013/06/28	JB96*11001
	NUMBER	SCALE	SIZE
	8:1	A3	RD1100101
			WVS SHIELD TYP
			05PH FEMALE
			REV
			A