



FPC/FFC Insert Direction
Recommended P.C.B Layout

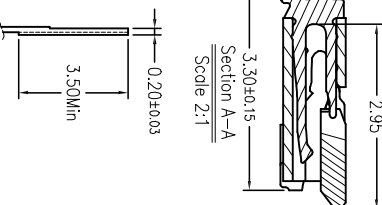

- Note:
- Material
 - 1.1: Housing: LCP UL94-V0 Color:Black.
 - 1.2: Cover: LCP UL94-V0 Color:Black.
 - 1.3: Contact: Phosphor Bronze.
 - 1.4: LEG: Phosphor Bronze.
 - Plating
 - 2.1: Contact: See Part Number.
 - 2.2: LEG: Matte Tin Plating Over Nickel.
 - Rating:
 - 3.1: Operating Voltage: 30V AC/DC.
 - 3.2: Current Rating: 0.2A AC/DC.
 - 3.3: Operating Temperature: -55°C~+85°C.
 - Part Number: 11-21-XX01-12

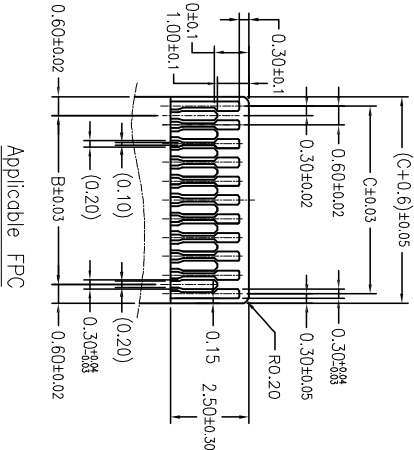

PIN NO	Dimension				
	A	B	C	D	E
13	5.40	3.00	3.60	4.30	4.90
15	6.00	3.60	4.20	4.90	5.50
17	6.60	4.20	4.80	5.50	6.10
19	7.20	4.80	5.40	6.10	6.70
21	7.80	5.40	6.00	6.70	7.30
23	8.40	6.00	6.60	7.30	7.90
25	9.00	6.60	7.20	7.90	8.50
27	9.60	7.20	7.80	8.50	9.10
29	10.20	7.80	8.40	9.10	9.70
31	10.80	8.40	9.00	9.70	10.30
33	11.40	9.00	9.60	10.30	10.90
35	12.00	9.60	10.20	10.90	11.50
37	12.60	10.20	10.80	11.50	12.10
39	13.20	10.80	11.40	12.10	12.70
41	13.80	11.40	12.00	12.70	13.30
45	15.00	12.60	13.20	13.90	14.50
49	16.20	13.80	14.40	15.10	15.70
51	16.80	14.40	15.00	15.70	16.30
57	18.60	16.20	16.80	17.50	18.10
61	19.80	17.40	18.00	18.70	19.30
67	21.60	19.20	19.80	20.50	21.10
71	22.80	20.40	21.00	21.70	22.30

东莞市宽拓电子科技有限公司
Dongguan Kuantuo Electronics Co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		APPROVED DATE		PART NO	
X.X	±0.15	11-21-XX01-12		11-21-XX01-12	
X.XX	±0.05	CHECKED DATE	DRAWING NO		JB96*09001
X.XXX	±0.05	DATE	COMPTER NO		
ANG.	±0°-30'	SCALE	NAME		FPC 03 CONNECTOR H10
DWT		SIZE	ZIF FOR SH(BOTTOM CNT)		REV A
MM		NUMBER	NUMBER		
SER	AREA	REVISIONS	CHK		DATE