


Type	Resonance FreCuency	Static capacitance	Resonance Impedence	Size(radial diameter and length	power	Insulation Impedence	Notes		
	(KHz)	(pF)	(Ω)	D*H	(W)	(2500V _{DC})			
GPC-8SS-2540	40±0.8	3100±10%	≤30Ω	25*58	20w	≥100MΩ	PZT8	Small power (10-40W)	
GPC-8SS-3045	46±1.0	2400±10%	≤25Ω	45*43	35w	≥100MΩ	PZT8		
GPC-4AS-1550	51.0±2.0	1700±10%	≤50Ω	15*58	10W	≥100MΩ	PZT4		
GPC-4AS-1540Y	40±2.0	3400±10%	≤30Ω	15*60	15W	≥100MΩ	PZT4		
GPC-4AS-1540	40±2.0	3400±10%	≤30Ω	15*58	15W	≥100MΩ	PZT4		
GPC-4SS-2540	40±0.8	2400±10%	≤30Ω	25*58	20w	≥100MΩ	PZT4		
GPC-4SH-2540	40±0.8	2400±10%	≤30Ω	30*50	20w	≥100MΩ	PZT4		
GPC-4AH-2560	60±1.5	2300±10%	≤35Ω	30*35	20w	≥100MΩ	PZT4		
GPC-4AS-2565	65±1.5	2300±10%	≤35Ω	25*31	20w	≥100MΩ	PZT4		
GPC-4AS-3055	55±1.0	3100±10%	≤35Ω	30*45	35w	≥100MΩ	PZT4		
GPC-4AH-3050	52±2.0	3100±10%	≤35Ω	38*40	35w	≥100MΩ	PZT4		
GPC-8SH-3517	17±1.0	2550±10%	≤28Ω	78*93	50w	≥100MΩ	PZT8		Middle power (50-60W)
GPC-8SH-3820	20±0.8	3800±10%	≤28Ω	59*99	60w	≥100MΩ	PZT8		
GPC-8SH-3823	23±0.8	3800±10%	≤28Ω	59*84	60w	≥100MΩ	PZT8		
GPC-8SH-3825	25±0.8	3800±10%	≤20Ω	59*80	60w	≥100MΩ	PZT8		
GPC-8SH-3828	28±0.5	3800±10%	≤20Ω	59*68	60w	≥100MΩ	PZT8		
GPC-8SH-3833	33±0.5	3800±10%	≤20Ω	48*61	60w	≥100MΩ	PZT8		
GPC-8SH-3840	40±0.5	3800±10%	≤20Ω	48*51	60w	≥100MΩ	PZT8		
GPC-4SS-3528	28 ±0.5	4000±10%	≤20Ω	45*79	50w	≥100MΩ	PZT4		
GPC-4AH-3540	40 ±1.0	4000±10%	≤20Ω	45*55	50w	≥100MΩ	PZT4		
GPC-4SH-3825	25±0.8	5100±10%	≤20Ω	59*80	60w	≥100MΩ	PZT4		
GPC-4SH-3828	28±0.5	5100±10%	≤20Ω	59*68	60w	≥100MΩ	PZT4		
GPC-4SS-3833	33±0.5	5100±10%	≤20Ω	45*61	60w	≥100MΩ	PZT4		
GPC-4SS-3835	35±0.5	5100±10%	≤20Ω	45*55	60w	≥100MΩ	PZT4		
GPC-4SH-3840	40±0.5	5100±10%	≤20Ω	48*51	60w	≥100MΩ	PZT4		
GPC-4SS-3868	67±2.0	5100±10%	≤20Ω	50*65	50w	≥100MΩ	PZT4		
GPC-4SS-3880	79±1.5	4200±10%	≤25Ω	40*54	60w	≥100MΩ	PZT4		
GPC-4SS-38100	100±1.5	5100±10%	≤25Ω	40*57	60w	≥100MΩ	PZT4		
GPC-4AS-38120	120±1.5	5100±10%	≤25Ω	40*58	60w	≥100MΩ	PZT4		
GPC-4SS-38130	129±1.5	4200±10%	≤25Ω	40*54	60w	≥100MΩ	PZT4		
GPC-4SS-38160	160±1.5	5100±10%	≤25Ω	40*57	60w	≥100MΩ	PZT4		
GPC-8SE-3828/40	28/40±1.0	3800±10%	≤30Ω	65*70	60w	≥100MΩ	PZT4		
GPC-4SS-3840/68	38/66±2.0	5100±10%	≤20Ω	50*65	50w	≥100MΩ	PZT4		
GPC-4SS-3840/80/130	38/79/128±2	4200±10%	≤25Ω	40*54	60w	≥100MΩ	PZT4		
GPC-4SS-3840/100/160	38/100/160±2.0	5100±10%	≤25Ω	40*57	60w	≥100MΩ	PZT4		
GPC-8SH-4520	21.5±0.8	5600±10%	≤20Ω	67*92	80w	≥100MΩ	PZT8	Mid-high Power (80-100W)	
GPC-8SH-4528	28±0.5	5600±10%	≤20Ω	67*68	80w	≥100MΩ	PZT8		
GPC-8SH-5028	28±0.5	7200±10%	≤20Ω	67*68	100w	≥100MΩ	PZT8		
GPC-4SH-4520	22±0.5	7600±10%	≤20Ω	67*92	80w	≥100MΩ	PZT4		

GPC-4SH-4525	25±0.5	7600±10%	≤20Ω	67*76	80w	≥100MΩ	PZT4	
GPC-4SH-4528	28±0.5	7600±10%	≤20Ω	67*68	80w	≥100MΩ	PZT4	
GPC-4SH-5028	28±0.5	9600±10%	≤20Ω	67*68	100w	≥100MΩ	PZT4	
GPC-8SH-5020	20±0.5	4650±10%	≤25Ω	79*94	120w	≥100MΩ	PZT8	High power (above 100w)
GPC-8SH-2020(5X4)	20±0.5	5000±10%	≤25Ω	35*89	60w	≥100MΩ	PZT8	
GPC-8SH-3020(5X4)	20±0.5	7000±10%	≤20Ω	45*88	80w	≥100MΩ	PZT8	
GPC-8SH-4020(5X4)	20±0.5	10000±10%	≤15Ω	54*88	120w	≥100MΩ	PZT8	
GPC-8SH-4520(5X4)	20±0.5	14500±10%	≤12Ω	64*88	160w	≥100MΩ	PZT8	
GPC-8SH-5020(5X4)	20±0.5	18000±10%	≤10Ω	74*88	200w	≥100MΩ	PZT8	

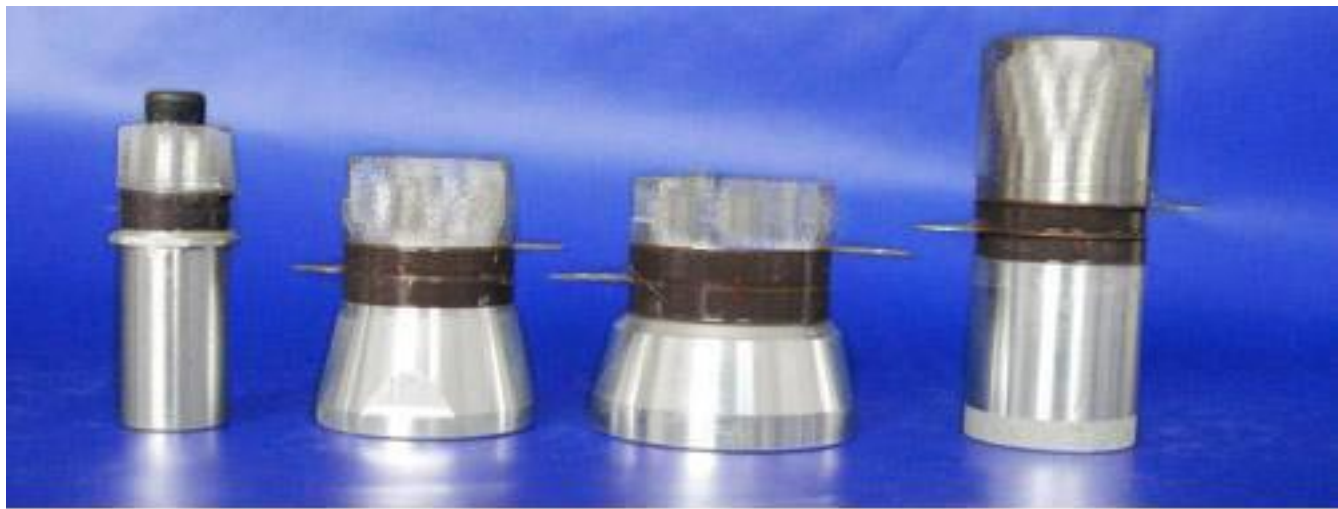

50KHZ

60KHZ

50KHZ

40KHZ



20KHZ 80W

20KHZ 100w

20KHZ 150w




33KHZ 60W

50KHZ 50W

40KHZ 60W

50KHZ 30W

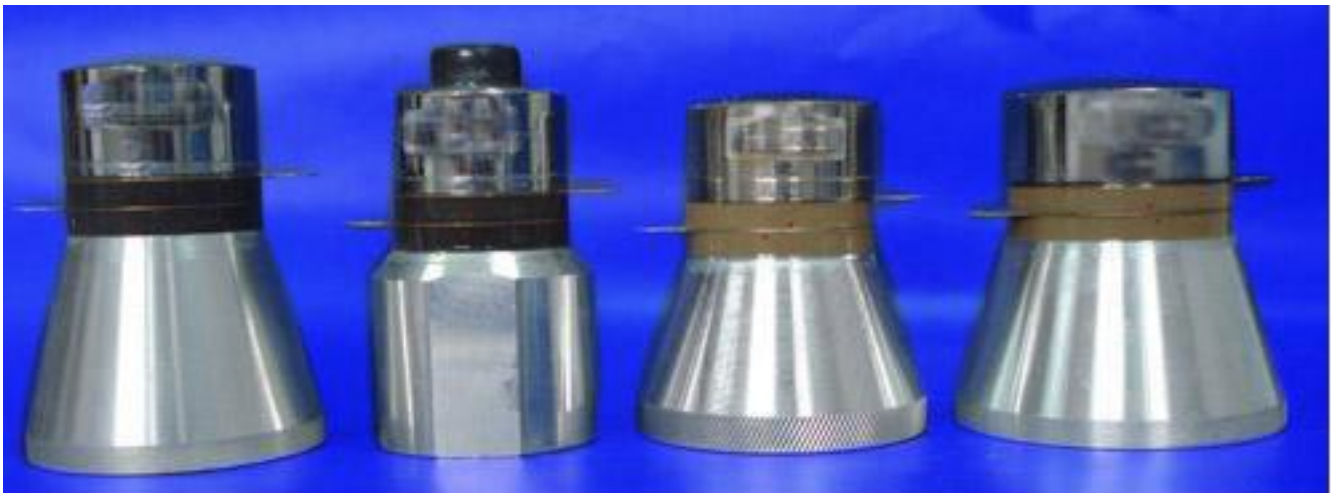

25KHZ 60W

28KHZ 50W

28KHZ 60W

28KHZ 80W



68KHZ 60W

80KHZ 60W

100KHZ 60W

120KHZ 50W



